

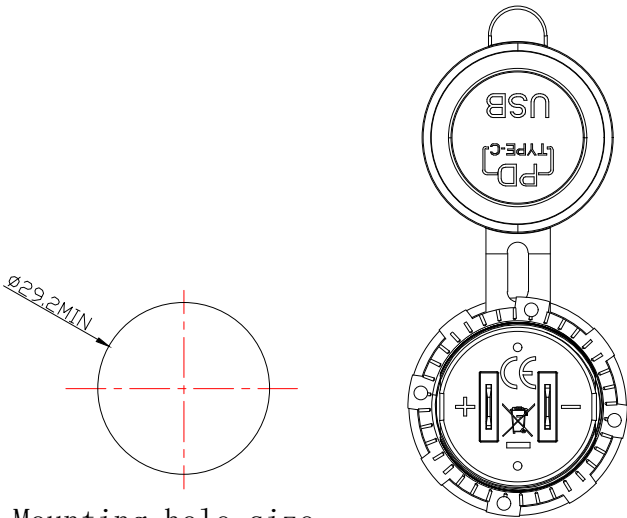
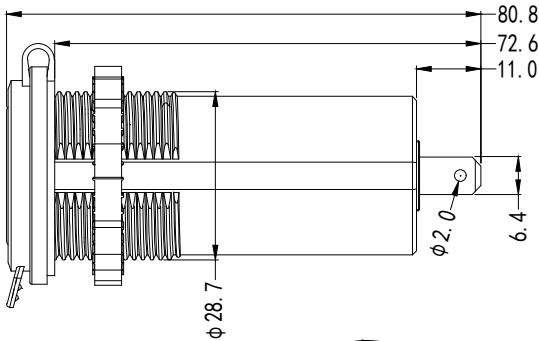
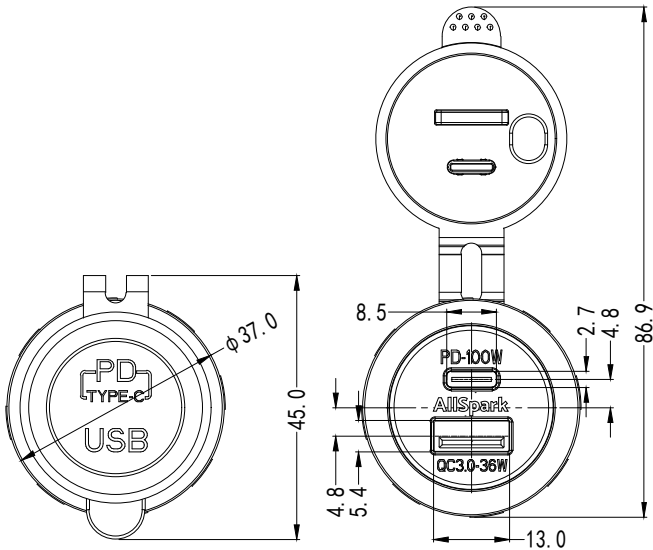


Specification:

1	USB contact resistance	<100mΩ
2	Protective cover opening force	<3000gf
3	USB power	<1000gf
4	USB pull force	<1500gf
5	Salt spray test	8H MIN NaCl 5%
6	Component impact resistance	8Kg.f MIN
7	Temperature range	-25°C<T<85°C MIN
8	Input voltage	9V-30V DC
9	Output	USB-A: 5V/3A, 9V/3A, 12V/3A USB-C: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A
10	Power consumption	QC: 36W MAX PD: 100W MAX

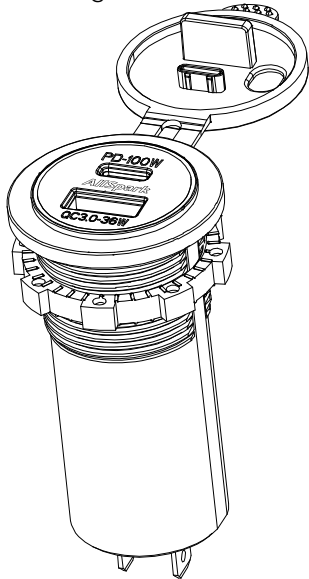

Mounting hole size

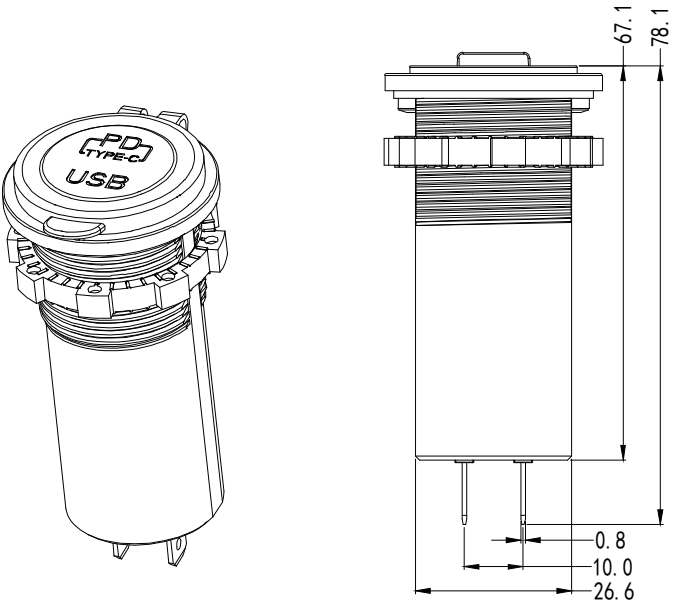

OFFROAD LIVING
UNIT 2, 29 PRESTIGE PARADE, WANGARA WA 6065
PH: 08 9305 8688
sales@offroadliving.com.au

DO NOT SCALE DRAWING
UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES: ±0.5
LINEAR: ±0.5
ANGULAR: ±0.5

DRAWN JMG		CREATED		CLIENT: OFFROAD LIVING	
CHK'D -		APP'D -		PROJECT: USB CHARGER	
CONFIGURATION DEFAULT			DESCRIPTION: 100W USB PD/QC		
MATERIAL:		FINISH: -			
SHEET 1/1		SCALE NTS	A4	DWG NO. OL-USB-PD100W	
				REVISION 0	

REV.	DESCRIPTION	DATE
	REVISIONS	